

SUPAGARD

AMAZON

NOMINAL RATED DEPTH CARTRIDGE



SUPAGARD is the latest development in nominal rated spun bonded filter cartridge design.

Manufactured with a true graded density, these elements exhibit a high void volume that results in low clean differential pressure losses and an excellent dirt holding capacity when compared to similarly rated elements. Each cartridge is complete with an integral support for maximum strength. The superior structure remains integral even under severe operating conditions and is less prone to media migration and breakthrough often found on other unsupported spunbonded products.

SUPAGARD cartridges are produced using a unique manufacturing process resulting in the following features:-

Nominal Rated Filter Media

- Available from 1 to 150µm
- Consistent reliable performance

Unique Construction

- One piece high strength all polypropylene support core
- High void volume, resulting in low clean Δp and excellent dirt holding capacity
- End cap welded direct to the core for extra security and strength
- Thermally bonded fibre matrix minimises fibre migration
- One piece construction up to 1524mm (60")
- **SUPAGARD ADVANTAGE** grade featuring moulded end caps and rigid outer support cage
- Optional glass filled core and end caps for high strength / temperature applications

Product Features

- 100% Polypropylene
- Materials meet US FDA Title 21 and USP Class VI requirements
- WRAS listed and Reg 31 approved for use in UK potable water supplies

SUPAGARD fibres are blown continuously onto a central support core, without the need for binders, resins or lubricants. This results in a one piece construction that is resistant to unloading and media shedding. True depth filtration results from the closely controlled fibre production in manufacturing, and also the process environment which ensures a consistent and reliable high quality element.

Elements are available up to 1524mm (60") in length, either double open ended or with most common end cap fittings, and also in 10" and 20" **B-BLUE** sizes.



SUPAGARD FEATURES AND BENEFITS

- Consistent and reliable performance and efficiency
- Identification embossed on every cartridge
- Graded density structure for maximum dirt holding capacity
- Increased void volume giving high flow rates and low initial pressure losses
- Wide chemical compatibility, using 100% polypropylene to meet FDA requirements
- Range of Nominal ratings from 1 to 150µm
- Thermal bonding process minimises media migration and ensures minimal extractables
- **ADVANTAGE** grade featuring moulded end caps and rigid outer support cage
- **B-BLUE** large diameter cartridges available in all grades

SUPAGARD

TECHNICAL DATA

Dimensions

Outside Diameter: 64mm
116mm (B-Blue)
Core Diameter: 28mm
Length: See ordering guide


Maximum Operating Conditions

Temperature 07PP: 80°C
07PD: 100°C
07PT: 100°C

Recommended Maximum Differential Pressure: 1.5 Bar

Maximum ΔP	PP Media PP Core	PP Media GFPP Core	PP Media St.St Core
@ 20°C	4.0	4.0	4.0
@ 50°C	1.5	4.0	4.0
@ 80°C	0.25	2.4	4.0
@ 100°C	-	1.5	4.0

Product validation guide available on request.

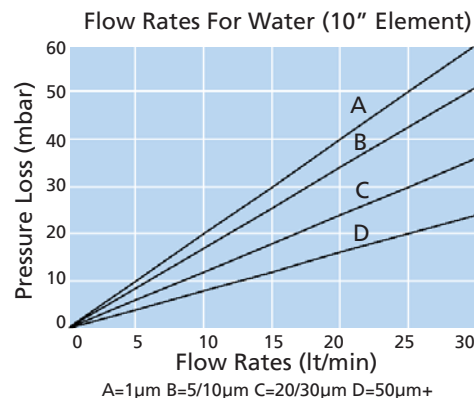

ORDERING GUIDE

07							A	
MEDIA	CORE/ASSEMBLY	MICRON RATING	LENGTH	END CAPS	SEAL	OPTIONS		
P - Polypropylene	STANDARD P - Polypropylene D - Glass filled polypropylene T - 316 St. St. V - Polypropylene with Voile ADVANTAGE W - Outer cage + moulded ends Y - Outer cage + glass filled core + moulded ends	001 - 1.0µm 005 - 5.0 010 - 10 020 - 20 030 - 30 050 - 50 075 - 75 100 - 100 150 - 150	05 - 125mm 09 - 251 10 - 254 19 - 500 20 - 508 29 - 752 30 - 762 39 - 1002 40 - 1016 60 - 1524	N - None A - Code A B - Code B* ¹ D - Code D S - Code S 2 - Code 2 3 - Code 3 7 - Code 7 8 - Code 8 0 - Code 0	N - None B - Buna E - EPDM F - FEP/Silicone P - PE Gasket S - Silicone V - Viton	BB - B-Blue* ² G - Glass filled PP end cap		

Example: 07PP005-20NPA = Polypropylene media and core, 5µm rating, double length 508mm (20") long, with Polyethylene seal.

*¹ Code B - to fit Amazon 50 Series housings only

*² B-Blue cartridges available in 251 and 508mm lengths only

INDUSTRIES AND APPLICATIONS

Food and Beverage	• Bottled water, Flavours, Polishing lines, Trap filters
Pharmaceuticals	• Base product clarification, Membrane pre-filtration, Bulk transfer
Fine Chemicals	• Solvents, Process streams, Water purification, Acids, Alcohols
Petrochemicals	• Waterflood, Completion fluids, Amine streams, Glycol
Cosmetics	• Alcohols, Essential oils, Water lines, Transfer filters
Water Treatment	• Membrane protection (Reverse Osmosis, Nano), Resin trap, Potable water
Metal Finishing	• Plating solutions, Paint and resin products, Wash solutions

AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD,
CAMBERLEY, SURREY, GU16 7PG
ENGLAND

Tel: +44 (0) 1276 670 600

Fax: +44 (0) 1276 670 101

Email: sales@amazonfilters.co.uk

Web: www.amazonfilters.co.uk



Certificate No. FM39584

Distributed by: